

C210

WAX HIGH PERFORMANCE

technical data sheet

Benefits

- ▶ excellent print quality on very small text
- ▶ printhead protection

Eco Friendly manufacturing

- ▶ solvent free


Supports

	out of 3
▶ vellum	●●●
▶ semi coated	●●○
▶ gloss coated	●●○
▶ film	○○○
▶ PP	●○○
▶ PE	●○○
▶ PET	●○○

Resistance

	out of 3
▶ dry rubbed	●●●
▶ metal scratch	●●○
▶ wet rubbed	●●●
▶ isopropanol	●○○
▶ toluene	●○○
▶ olive oil	●○○
▶ animal fats	●●○

Performance Ratings

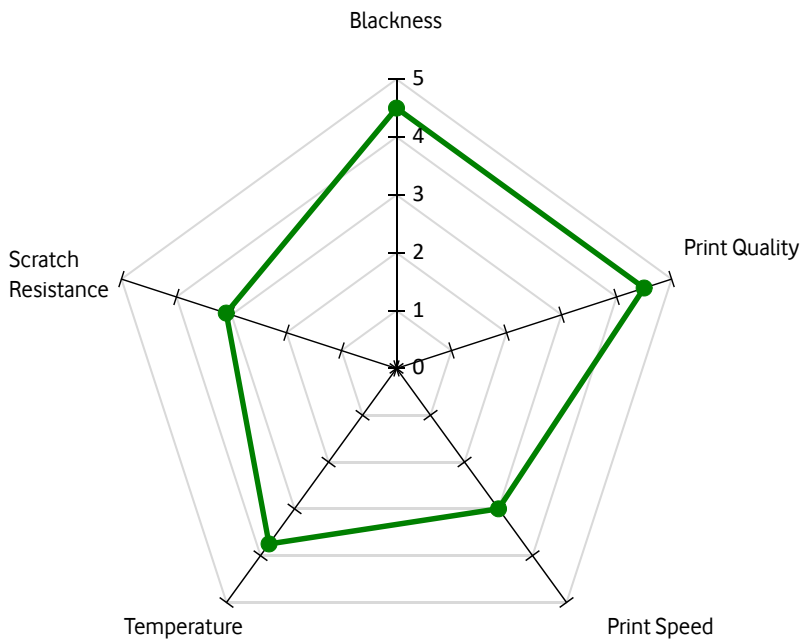

Technical Specifications

Printer	flat head
PET film thickness	4.5 µm
Ribbon thickness	<8.5 µm
Ink Melting Point	65°C
printing speed up to	300 mm/s
printing temperature	25%

Storage conditions

5°C to 35°C

Expiration

1 year

Imaging Characteristics

	out of 5
Blackness	●●●●●
Sharpness	●●●●●
0° barcode (h)	●●●●●
90° barcode (v)	●●●●○
Graphic	●●●●○

- Please note that these specifications are only a guide. Orlando copack suggests tests to be made for each specific case.

Applications

