

E200 RESIN FLEXIBLE DUAL - FLAT HEAD & NEAR EDGE

technical data sheet

Benefits

- ▶ prints on both flat head and near edge
- ▶ prints on different plastic supports

Eco Friendly manufacturing

- ▶ solvent free
- ▶ free of halogenated compounds
- ▶ free of bisphenol A

Supports

	out of 3
▶ vellum	○○○
▶ matt coated	○○○
▶ gloss coated	○○○
▶ film	●●●
▶ PP	●●●
▶ PE	●●●
▶ PET	●●●
▶ textile	○○○

Resistance

	out of 3
▶ dry rubbed	●●●
▶ metal scratch	●○○
▶ wet rubbed	●●●
▶ isopropanol	●○○
▶ toluene	●○○
▶ olive oil	●●○
▶ animal fats	●●○

Technical Specifications

Printer	flat head / near edge
PET film thickness	4.5 μm
Ribbon thickness	6.5 ± 0.2 μm
Ink Melting Point	80°C
printing speed up to	350 mm/s
printing temperature	75%

Storage conditions

5°C to 35°C – 45% to 85% relative humidity
Protect from sunlight


Expiration

1 year

Compliance

- ▶ ISO 9001
- ▶ ISO 14001
- ▶ REACH/SVHC free
- ▶ Rohs compliant
- ▶ 1935/2004 CE food contact

Performance Ratings

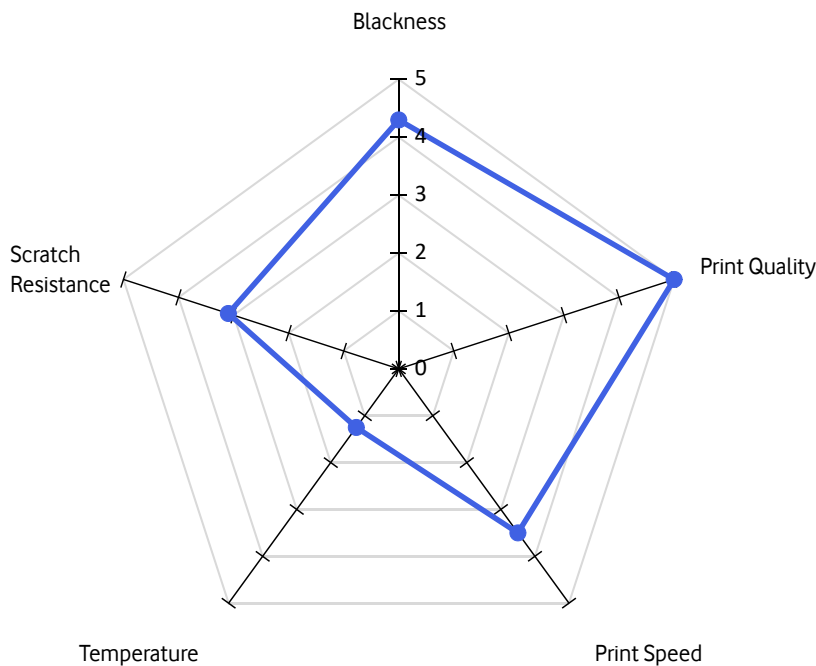

Imaging Characteristics

	out of 5
Blackness	●●●●○
Sharpness	●●●●●
0° barcode (h)	●●●●●
90° barcode (v)	●●●●●
Graphic	●●●●●

- Please note that these specifications are only a guide.
Orlando copack suggests tests to be made for each specific case.

Applications

