

# F210

# WAX RESIN TTO - NEAR EDGE

## technical data sheet

### Benefits

- ▶ designed for both desktop printers / online bookmarks
- ▶ variable speed up to 500 mm/s
- ▶ excellent print quality on wide variety of packaging substrates

### Eco Friendly manufacturing

- ▶ solvent free
- ▶ free of halogenated compounds
- ▶ free of bisphenol A

### Supports

	out of 3
▶ vellum	●○○
▶ matt coated	●●○
▶ gloss coated	●●●
▶ film	●●●
▶ PP	●●●
▶ PE	●●●
▶ PET	●●●
▶ textile	●○○

### Resistance

	out of 3
▶ dry rubbed	●○○
▶ metal scratch	●○○
▶ wet rubbed	●●●
▶ isopropanol	●○○
▶ toluene	●○○
▶ olive oil	●○○
▶ animal fats	●○○

### Technical Specifications

Printer	near edge
PET film thickness	4.5 μm
Ribbon thickness	6.05 ± 0.1 μm
Ink Melting Point	80°C
printing speed up to	500 mm/s
printing temperature	5%

### Storage conditions

5°C to 35°C – 45% to 85% relative humidity  
Protect from sunlight


### Expiration

1 year

### Compliance

- ▶ ISO 9001
- ▶ ISO 14001
- ▶ REACH/SVHC free
- ▶ RoHS compliant
- ▶ 1935/2004 CE food contact

### Performance Ratings

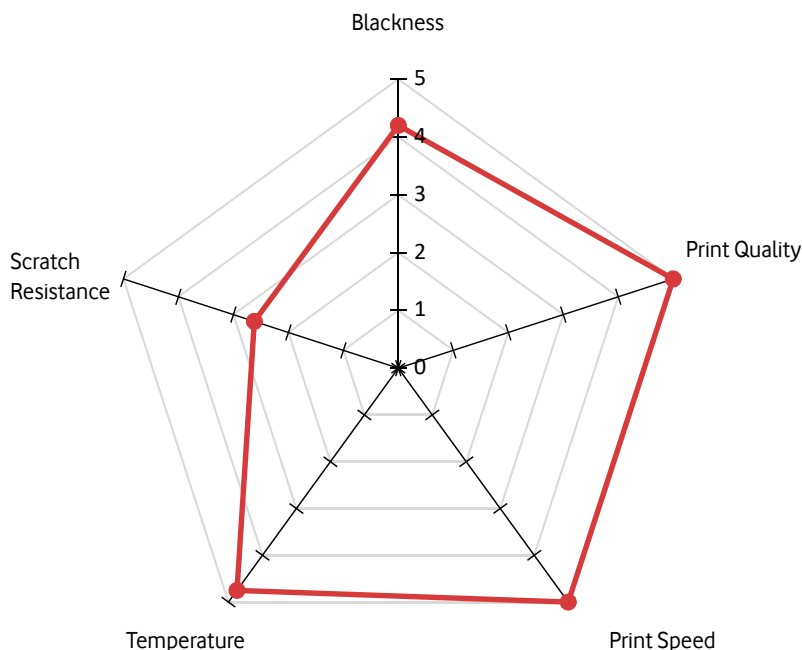

### Imaging Characteristics

	out of 5
Blackness	●●●●○
Sharpness	●●●●●
0°barcode (h)	●●●●●
90° barcode (v)	●●●●○
Graphic	●●●●○

- Please note that these specifications are only a guide.  
Orlando copack suggests tests to be made for each specific case.

### Applications

